

AD-A036 400

FRANKFORD ARSENAL PHILADELPHIA PA  
EVALUATION OF BARRIER MATERIALS: METAL ALLOYS, FIBERS, AND PLAT--ETC(U)  
JAN 77 J P LEAHY, E A LUCIA


F/G 11/6

UNCLASSIFIED

FA-TN-77001

NL

1 of 1  
ADA036400

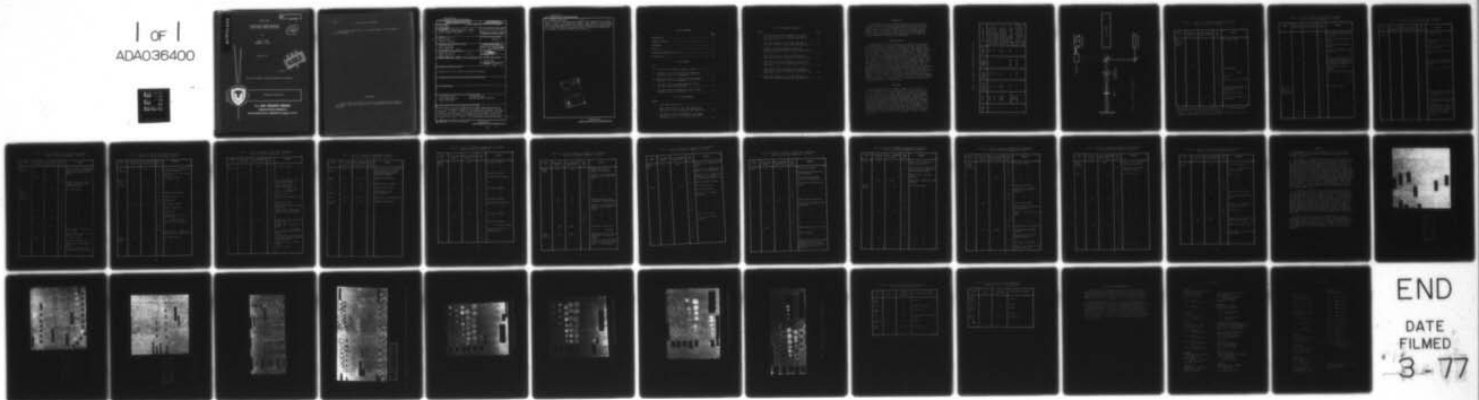


END

DATE

FILMED

3-77

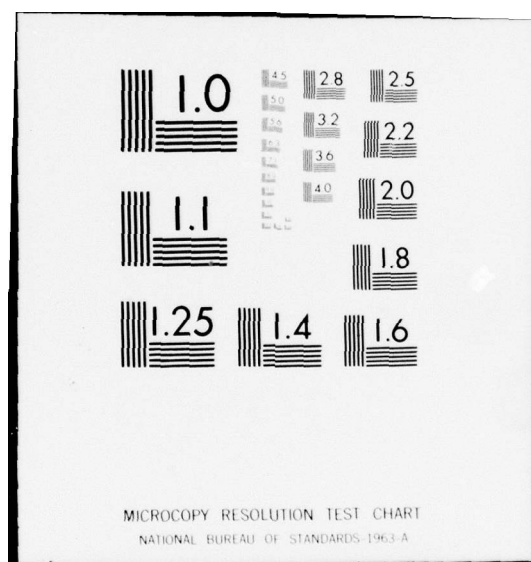

ADA036400

AD

FA-TN-77001

EVALUATION OF BARRIER MATERIALS:  
METAL ALLOYS, FIBERS, AND PLATES

by

JOHN P. LEAHY  
EMMANUEL A. LUCIA

January 1977

DDC  
RECEIVED  
MAR 7 1977  
C

Approved for public release; distribution unlimited.



Pitman-Dunn Laboratory

**U.S. ARMY ARMAMENT COMMAND**  
**FRANKFORD ARSENAL**  
**PHILADELPHIA, PENNSYLVANIA 19137**

DISPOSITION INSTRUCTIONS

Destroy this report when it is no longer needed. Do not return it to the originator.

DISCLAIMER

The findings in this report are not to be construed as an official Department of the Army position unless so designated by other authorized documents.



UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM
1. REPORT NUMBER FA-TN-77001	2. GOVT ACCESSION NO.	3. RECIPIENT'S CATALOG NUMBER
4. TITLE (and Subtitle) EVALUATION OF BARRIER MATERIALS: METAL ALLOYS, FIBERS, AND PLATES	5. TYPE OF REPORT & PERIOD COVERED Technical research report	6. PERFORMING ORG. REPORT NUMBER
7. AUTHOR(s) John P. Leahy Emmanuel A. Lucia	8. CONTRACT OR GRANT NUMBER(s) 17 01	9. PERFORMING ORGANIZATION NAME AND ADDRESS Frankford Arsenal Attn: SARFA-PDS Philadelphia, PA 19137
10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS AMCMS Code: 62205.11.H8801 DA Proj. 1F262205AH8801	11. CONTROLLING OFFICE NAME AND ADDRESS Eustis Directorate AMRDL, Ft. Eustis Newport News, VA 23604	12. REPORT DATE 11 Jan 1977
13. NUMBER OF PAGES 35	14. MONITORING AGENCY NAME & ADDRESS (if different from Controlling Office)	15. SECURITY CLASS. (of this report) UNCLASSIFIED
16. DISTRIBUTION STATEMENT (of this Report) Approved for public release; distribution unlimited.		
17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)		
18. SUPPLEMENTARY NOTES		
19. KEY WORDS (Continue on reverse side if necessary and identify by block number) High Energy Laser      Internal Barriers Laser Countermeasures      High Energy Laser Protection Barrier Materials		
20. ABSTRACT (Continue on reverse side if necessary and identify by block number) The resistance of various commercially available lightweight materials to CO <sub>2</sub> laser damage was examined. Five samples were supplied for laser evaluation: (1) D242, a needle punched and rolled alloy fiber, (2) 304SS stainless steel fibers web sintered and rolled, (3) 430SS, a stainless steel sinter on hard backing, (4) FM515 with Inconel 600 backing, and (5) a graphite woven cloth. A 100 W CO <sub>2</sub> laser beam was focused to provide		

next  
page

DD FORM 1 JAN 73 1473 EDITION OF 1 NOV 65 IS OBSOLETE

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

142 720

mt

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE(When Data Entered)

20. ABSTRACT (continued)

cont → various irradiance levels up to 6.7 KW/cm<sup>2</sup>. <sup>Sq cm</sup> These samples may be exposed safely at about 20 watts/cm<sup>2</sup>. For kilowatt level exposures, dark finished samples are more robust than bright finished samples of the same material. At 6.7 KW/cm<sup>2</sup>, all materials are penetrated in less than one second with the exception of 430SS and DH242 wet with water. ↑

ADDITIONAL	White Section	<input checked="" type="checkbox"/>
RTIS	Dark Section	<input type="checkbox"/>
DTIS		<input type="checkbox"/>
UNANNOUNCED		
JUSTIFICATION		
BY	DISTRIBUTION/AVAILABILITY CODES	
Dist.	AVAIL. AND/OR SPECIAL	
A		

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE(When Data Entered)

## TABLE OF CONTENTS

	<u>Page</u>
INTRODUCTION.....	3
MATERIALS TESTED.....	3
PROCEDURE.....	3
RESULTS.....	21
CONCLUSIONS AND RECOMMENDATIONS.....	33
DISTRIBUTION.....	34

## LIST OF TABLES

### Table

I	Properties of Lightweight Materials Tested.....	4
II	Results of Exposure of Dark Finish Lightweight Materials to CO <sub>2</sub> Laser Radiation.....	6
III	Results of Exposure of Bright Finish Lightweight Materials to CO <sub>2</sub> Laser Radiation.....	13
IV	CO <sub>2</sub> Laser Irradiance Damage Threshold of Dark Unfinished Lightweight Materials.....	31
V	CO <sub>2</sub> Laser Irradiance Damage Threshold of Bright Finished Lightweight Materials.....	32

## LIST OF ILLUSTRATIONS

### Figure

1	Laser Exposure Apparatus.....	5
2	DH242 After Exposure to CO <sub>2</sub> Laser Radiation at Indicated Irradiances (watts/cm <sup>2</sup> , and times (sec)).....	22
3	304 Stainless Steel After Exposure to CO <sub>2</sub> Laser Radiation at Indicated Irradiances (watts/cm <sup>2</sup> ), and times (sec).....	23

# LIST OF ILLUSTRATIONS (Cont'd)

<u>Figure</u>		<u>Page</u>
4	430 Stainless Steel After Exposure to CO <sub>2</sub> Laser Radiation at Indicated Irradiances (watts/cm <sup>2</sup> ), and times (sec).....	24
5	FM515 After Exposures to CO <sub>2</sub> Laser Radiation at Indicated Irradiances (watts/cm <sup>2</sup> ), and times (sec).....	25
6	Graphite Cloth After Exposure to CO <sub>2</sub> Laser Radiation at Indicated Power Densities (watts/cm <sup>2</sup> ), and times (sec).....	26
7	DH242 After Exposures to CO <sub>2</sub> Laser Radiation at Indicated Irradiances (watts/cm <sup>2</sup> ), and times (sec).....	27
8	304 Stainless Steel After Exposures to CO <sub>2</sub> Laser Radiation at Indicated Irradiances (watts/cm <sup>2</sup> ) and times (sec).....	28
9	430 Stainless Steel After Exposures to CO <sub>2</sub> Laser Radiation at Indicated Irradiances (watts/cm <sup>2</sup> ), and times (sec).....	29
10	FM515 After Exposures to CO <sub>2</sub> Laser Radiation at Indicated Irradiances (watts/cm <sup>2</sup> ), and times (sec).....	30



## INTRODUCTION

The development of the CO<sub>2</sub> laser presents a variety of problems in laser protective shielding, including materials for routine laboratory baffles. There are potentially useful lightweight materials commercially available which can be easily cut and formed into any desired shape. The purpose of this study is to determine whether several commercially available shielding materials hold promise for protection against high energy laser radiation.

## MATERIALS TESTED

Experimental studies were conducted on a number of commercially available metal fiber materials to determine the feasibility of their use as high energy laser barriers. The materials were obtained from the Brunswick Corporation, Sugar Grove, Virginia. The company furnished a woven graphite cloth and four sets of paired samples. Within each pair the sample designation is the same except for the surface appearance, that is, one is dark and the other is bright. The dark finishes were obtained by preoxidizing bright samples. A summary of their physical properties is included in Table I. These materials vary in texture from the soft matted DH242 and 304SS to the platelike FM515. The matted cloth, DH242, is made up of very fine metal fibers rendering it flexible, soft, and spongy. Because of these qualities, it can be impregnated with laser attenuating materials, such as water for absorbing the CO<sub>2</sub> laser, to further attenuate the laser beam. The 304SS, which is made of stainless steel fibers, is not as flexible as the DH242 because its fibers are more closely woven, thus rendering it not as spongy. The other samples are composed of large fibers that are solidly compressed into a rigid metal board (430SS) or onto a metal plate (FM515). The latter resembles a granular surface. The graphite sample consists of spun fibers woven into a black cloth.

## PROCEDURE

The experimental setup is shown in Figure 1. The laser is a Coherent Radiation, Model 40, single mode, CO<sub>2</sub> laser. The laser output beam was used at full width, 1.905 cm, for irradiances between 1.75 to 35 watts/cm<sup>2</sup>; and focused down with a water cooled germanium lens to obtain a 0.137 cm diameter spot for higher irradiances. The irradiances were determined by first measuring the energy output of the laser with a Coherent Radiation Laboratory, Model 203, thermopile detector and dividing it by the burn spot area and the time of incidence on the detector ( $H = \text{joules/cm}^2 \text{ sec}$ ). In the diagram, M is a 100% mirror, used to deflect the laser beam into the thermopile. The helium-neon laser is necessary to align the sample to the CO<sub>2</sub> laser in order to assure that a different area of each sample was used for each exposure. The conditions of the exposures are given in Tables II and III.

Table I. Properties of Lightweight Materials Tested

SAMPLE #	ALLOY	FIBER DIA. (microns)	DENSITY (lbs/ft. <sup>2</sup> )	TENSILE STRENGTH (PSI)	THICKNESS (in.)	OTHER PROPERTIES
1	DH242	8.0	.205	---	.400	Needle punches and rolled to final density
2	304SS	8.0	.219	---	.220	Stainless-steel web, sintered and rolled to final density
3	430SS/ FM1311	46.1- 62.0	1.97	---	--- ±.015	No tensile strength specification, ±2% tolerance on density, ±.015 tolerance on thickness
4	FM515 with Inconel 600	6.0	---	950-2,800	.250	.190" FM515 - backed with .060" Inconel 600
5	Graphite	---	.063	360,000	---	Modulus → 34 x 10 <sup>6</sup> lbs/in <sup>2</sup> , Breaking Strength → 13.5 lbs, % Elongation → 1.1%, Specific Heat → 1.7



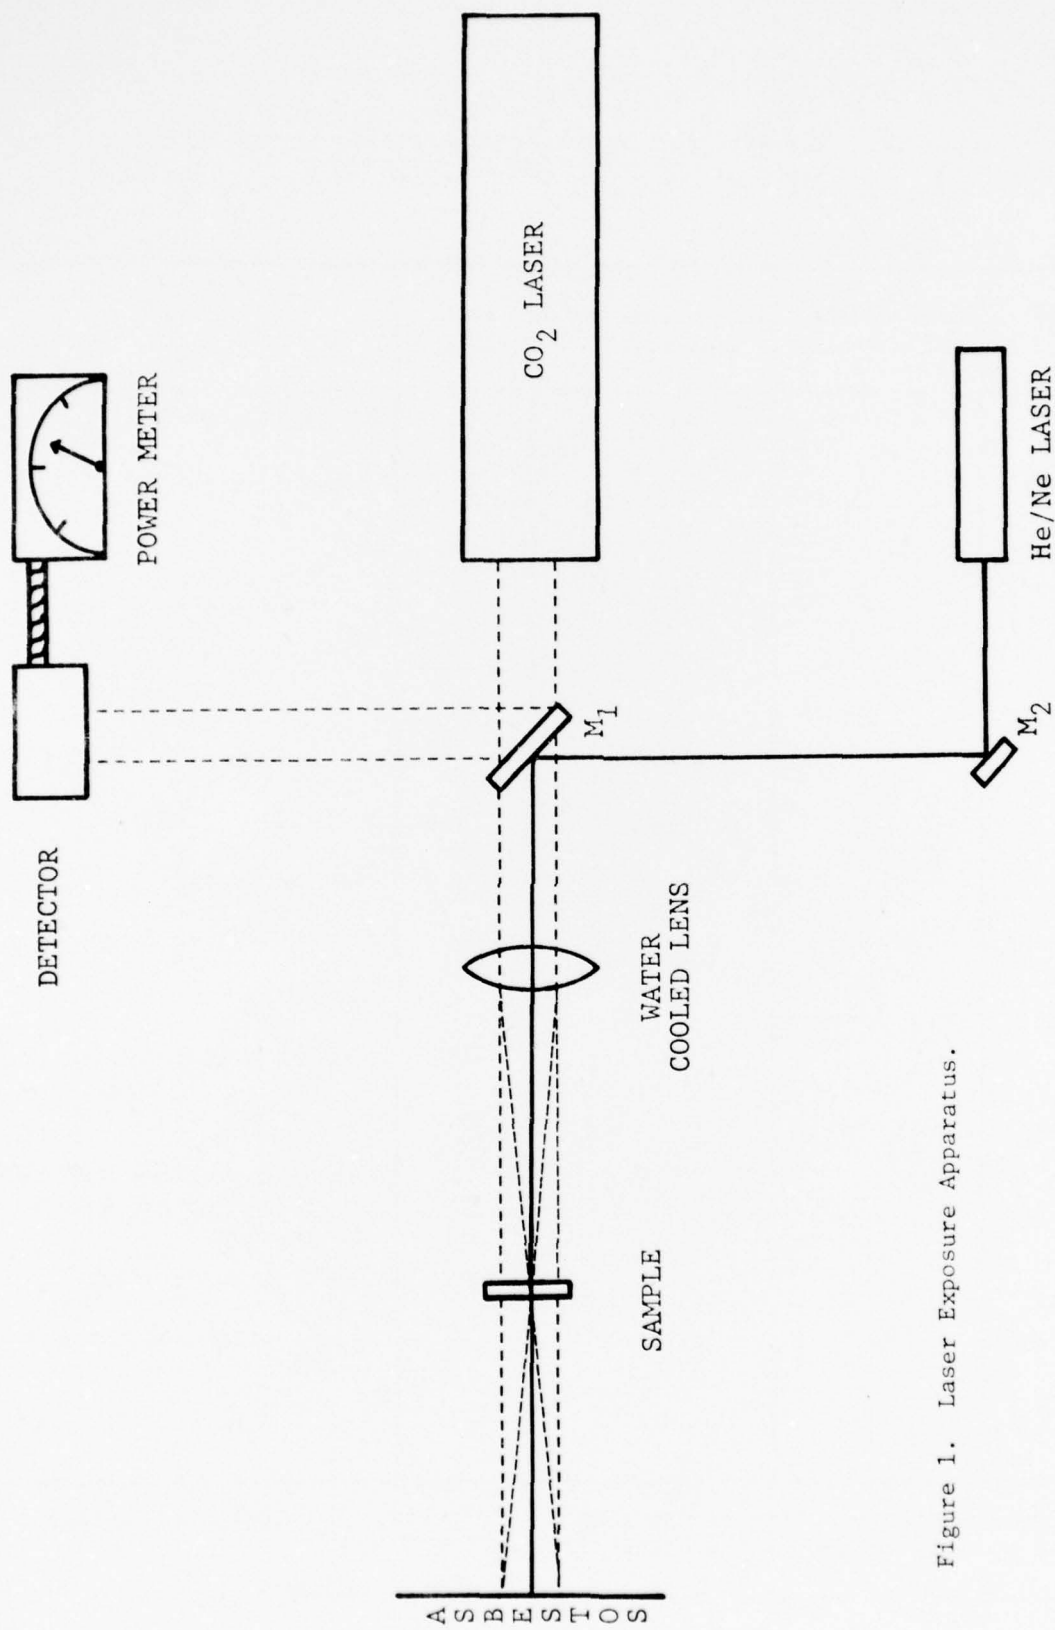


Figure 1. Laser Exposure Apparatus.

Table II. Results of Exposure of Dark Finish Lightweight Materials to CO<sub>2</sub> Laser Radiation

SAMPLE #	BEAM POWER (Watts*)	POWER IRRADIANCE (Watts/cm <sup>2</sup> ) †	TIME (sec)	REMARKS
#1 DH242 Needled Web	5	1.75	1	No visible change
			2	" " "
			4	" " "
			8	" " "
			16	" " "
			32	" " "
	10	3.5	64	" " "
			2	" " "
			4	Glowing begins
			8	" " (red)
			16	Glow red
			32	Reaches & stays at red glow
	20	7.0	64	" " " " " "
			1	Immediately glows dark red. Starts bright red & in 2 sec reaches
			64	Orange & stays orange
	50	17.5	1	Starts bright orange & goes to yellow
			2	" " " " "

\*The wattage meter was fluctuating through the tests. The indicated wattage is estimated to be at the center of the fluctuation.

† Irradiance was determined by dividing the indicated wattage\* by the area of the beam.  $r = 3/8" = 0.95 \text{ cm}$ .  $A = \pi r^2 = 2.85 \text{ cm}^2$ .

Table II. Results of Exposure of Dark Finish Lightweight  
Materials to CO<sub>2</sub> Laser Radiation (cont'd)

SAMPLE #	BEAM POWER (Watts*)	POWER IRRADIANCE (Watts/cm <sup>2</sup> )	TIME (sec)	REMARKS
#2 304 Stainless Steel Sintered Web Preoxidized	100	35.	4	Starts bright orange & goes to yellow
			8	Discoloring & very little smoke
			16	Discoloring increases (no smoke)
			32	Further discoloration, same as 16 sec
			64	" " "
			1	Starts orange glow & goes to bright yellow; larger area of glowing. Extreme orange & bright yellow at center
			2	Discoloration, surface damage
			4	Damage increases, same as 2 sec
			8	" " " " "
			16	" " " " "
	5	1.75	32	" " " " "
			64	" " " " "
			1	No visible change
			2	" " "
			4	" " "
			8	" " "
			16	" " "
			32	" " "
			64	" " "
	10	3.5	64	" " "
	20	7.0	1	" " "

Table II. Results of Exposure of Dark Finish Lightweight Materials to CO<sub>2</sub> Laser Radiation (cont'd)

SAMPLE #	BEAM POWER (Watts*)	POWER IRRADIANCE (Watts/cm <sup>2</sup> )	TIME (sec)	REMARKS
#2 (cont'd)	20	7.0	2	No visible change
			4	" " "
			8	Discoloring begins, loose fibers glow
			16	Discoloring increased, red glow very faint
			32	Further discoloration, dark red glow
			64	" " "
	50	17.5	1	Orange, almost yellow glow, discoloring, slight surface damage
			2	Same as 1 sec. (Larger area)
			4	" " " " " "
			8	" " " " " "
			16	" " " " " "
			32	" " " "
			64	" " " "
	100	35.	1	Very bright orange to yellow, discolorations, damage to outer layer.
			2	Very bright orange to yellow, discolorations, damage in center.
			4	Extremely bright orange to yellow to white, discolorations, extensive damage to large portion of area exposed. Glow remains after beam.

Table II. Results of Exposure of Dark Finish Lightweight Materials to CO<sup>2</sup> Laser Radiation (cont'd)

SAMPLE #	BEAM POWER (Watts*)	POWER IRRAD. (Watts/cm <sup>2</sup> )	TIME (sec)	REMARKS
#2 (cont'd)	100	35.	8	Same as 4 sec. + discoloring on back increases, increasing damage, glow remains after beam.
			16	" " " "
			32	" " " "
			64	Extensive damage to back of sample, cracks where beam nearly penetrated.
#3 430 Stainless Steel Preoxidized FMI311	5	1.75	1	No visible change.
			2	" " "
			4	" " "
			8	" " "
			16	" " "
			32	" " "
			64	" " "
	10	3.5	16	" " "
			32	" " "
			64	" " "
	20	7.0	16	" " "
			32	" " "
			64	" " "
	50	17.5	16	" " "
			32	Deep red glow, discoloration at 20 seconds.
			64	Deep red glow, constant, discoloration is dark.
	100	35.	2	No visible change.
			4	Begins to glow light red.
			8	Orange glow & discoloration begins.
			16	Orange glow lingers after beam, discoloration increases.



Table II. Results of Exposure of Dark Finish Lightweight Materials to CO<sub>2</sub> Laser Radiation (cont'd)

SAMPLE #	BEAM POWER (Watts*)	POWER IRRADIANCE (Watts/cm <sup>2</sup> )	TIME (sec)	REMARKS
#3 (cont'd)	100	35.	32	Same as 16 sec. + some fibers are blue and white.
			64	Same as 32 sec., more fibers are white.
#4 FM515 with .060" Inconel backing.	5	1.75	64	No visible change.
			64	" " "
			64	" " "
			64	" " "
	100	35.	8	" " "
			16	Light red glow begins.
			32	Deep red glow.
			64	Orange glow.
			< 1	No visible change.
			1	Begins orange glow.
			2	Orange glow.
			4	Orange glow, very slight discoloration.
			8	" (yellow at center, discoloration increases).
			16	" " "
			32	" " "
			64	" " " + discoloration, damage to surface (cracks), vaporization.
#5 Graphite Cloth	10	3.5	1	No visible change.
			2	" " "
			4	" " "
			8	" " "
			16	" " "



Table II. Results of Exposure of Dark Finish Lightweight Materials to CO<sub>2</sub> Laser Radiation (cont'd)

SAMPLE #	BEAM POWER (Watts*)	POWER IRRADIANCE (Watts/cm <sup>2</sup> )	TIME (sec)	REMARKS
#5 (cont'd)	10	3.5	32	No visible change.
			64	" " "
			1	" " "
			2	" " "
			4	" " "
			8	Discoloring begins, faint red to orange glow.
			16	Discoloring increases, light orange glow.
			32	" " " , dark orange glow, initial smoke.
	20	7.0	64	Same as 32 sec.
			1	Begins to glow orange, odor.
			2	" " " " "
			4	Orange glow, odor.
			8	Discoloration begins, initial smoke, odor.
			16	Increasing discoloration & damage + same as 8 seconds.
			32	" " "
			64	" " "
	50	17.5	1	Orange glow (glows through to back), odor.
			2	Bright orange glow, smoke, odor.
			4	" " " , no smoke, odor, damage and discoloring begins.
			8	Bright orange to yellow glow, odor, and increasing damage + discoloration.
			16	Same as 8 secs. + initial smoke.
			32	Same as 16 secs.
	100	35.		

Table II. Results of Exposure of Dark Finish Lightweight  
Materials to CO<sub>2</sub> Laser Radiation (cont'd)

SAMPLE #	BEAM POWER (Watts*)	POWER IRRADIANCE (Watts/cm <sup>2</sup> )	TIME (sec)	REMARKS
#5 (cont'd)	100	35.	64	Same as 16 secs. Increasing glow through to back and increasing damage and dis- coloring throughout.
DH242 (dry)	100	$6.7 \times 10^3$	< 2	Complete penetration.
(wet)	100	$6.7 \times 10^3$	80	Minimal surface damage.
304 SS	100	$6.7 \times 10^3$	< 1	Complete penetration
430 SS/ FMI311	100	$6.7 \times 10^3$	22	90% penetration and discolored back.
FM515	100	$6.7 \times 10^3$	1	Penetrated to plate backing.
Graphite Cloth	100	$6.7 \times 10^3$	< 1	Complete penetration.

Table III. Results of Exposure of Bright Finish Lightweight Materials to CO<sub>2</sub> Laser Radiation

SAMPLE #	BEAM POWER (Watts)	POWER IRRADIANCE (Watts/cm <sup>2</sup> )	TIME (sec)	REMARKS
DH242 (dry)	5	1.75	1	No visible change.
			2	" " "
			4	" " "
			8	Discoloring begins.
			16	Discoloration increases.
			32	" "
			64	" "
	10	3.5	1	No visible change.
			2	" " "
			4	" " "
			8	Discoloring begins.
			16	Discoloration increases.
			32	" "
			64	" "
	20	7.0	1	No visible change.
			2	" " "
			4	Discoloring begins.
			8	" " and surface damage.
			16	Discoloration & surface damage increases.
			32	" " "
			64	" " "

Table III. Results of Exposure of Bright Finish Lightweight Materials to CO<sub>2</sub> Laser Radiation (cont'd)

SAMPLE #	BEAM POWER (Watts)	POWER IRRADIANCE (Watts/cm <sup>2</sup> )	TIME (sec)	REMARKS
DH242 (dry)	50	17.5	1	Orange glow, surface damage & discoloration.
			2	Same as 1 sec., increasing brightness and discoloring size.
			4	" " "
			8	" " "
			16	" " "
			32	" " "
			64	" " "
	100	35	1	Orange-yellow glow, discoloration & surface damage.
			2	Same as 1 sec. with increasing glow, discolorings & damage.
			4	" " "
			8	" " "
			16	" " "
			32	" " "
			64	" " "
DH242 (wet)	100	1,000	< 1	Glow white, burns deep.
			1	" " " through.
	100	1,000	1	Glow white, hisses as water evaporates, some surface damage.
			2	Glow white through to back, hisses as water evaporates, burns ~ 1/2 way through.

Table III. Results of Exposure of Bright Finish Lightweight Materials to CO<sub>2</sub> Laser Radiation (cont'd)

SAMPLE #	BEAM POWER (Watts)	POWER IRRADIANCE (Watts/cm <sup>2</sup> )	TIME (sec)	REMARKS
DH242 (wet)	100	1,000	4	Same as 2 sec. except burns deeper.
			8	Same as 4 sec. except beam begins to come through back.
			16	Same as 8 sec., steam is seen during and after exposure, more beam getting out of back.
			32	Burns completely through.
304 SS	5	1.75	1	No visible change.
			2	Discoloration begins.
			4	Discoloration gradually increases.
			8	" " "
			16	" " "
			32	" " "
	10	3.5	64	" " "
			1	Discoloration begins.
			2	Discoloration gradually increases.
			4	" " "
			8	" " "
			16	" " "
			32	" " "
			64	" " "



Table III. Results of Exposure of Bright Finish Lightweight Materials to CO<sub>2</sub> Laser Radiation (cont'd)

SAMPLE #	BEAM POWER (Watts)	POWER IRRADIANCE (Watts/cm <sup>2</sup> )	TIME (sec)	REMARKS
304 SS	20	7.0	1	Discoloration begins.
			2	Discoloration increases and red glow begins.
			4	Discoloration gradually increases and orange glow.
			8	Increasing discoloration and glow.
			16	" " "
			32	" " "
			64	" " "
	50	17.5	1	Glow orange and discolors.
			2	Increasing discoloration and orange glow.
			4	" " "
			8	" " "
			16	" " "
			32	" " "
			64	" " "
	100	35	1	Glow bright yellow, discolors.
			2	" " " surface damage.
			4	" " "
			8	Glow yellow, discolors, glow brighter yellow as surface burns and spreads, discolors on back; glow remains after exposure.



Table III. Results of Exposure of Bright Finish Lightweight Materials to CO<sub>2</sub> Laser Radiation (cont'd)

SAMPLE #	BEAM POWER (Watts)	POWER IRRADIANCE (Watts/cm <sup>2</sup> )	TIME (sec)	REMARKS
304 SS           430SS/ FM1311	100	35	16	Same as 8 sec. except dis- colors on back also.
			32	Same as 16 sec. except burned hole through back and more discoloration on back.
			64	Same as 32 sec. but more intense.
	100	~1,000	< 1	Glow white, completely burns through.
	5	1.75	1	No visible change.
			2	" " "
			4	" " "
			8	" " "
			16	" " "
			32	" " "
			64	" " "
			64	" " "
	10	3.5	1	" " "
			2	" " "
			4	" " "
			8	" " "
			16	" " "
			32	" " "
			64	" " "
			64	" " "
	20	7.0	1	" " "
			2	" " "
			4	" " "
			4	" " "

Table III. Results of Exposure of Bright Finish Lightweight Materials to CO<sub>2</sub> Laser Radiation (cont'd)

SAMPLE #	BEAM POWER (Watts)	POWER IRRADINACE (Watts/cm <sup>2</sup> )	TIME (sec)	REMARKS
430SS/ FM1311 (cont'd)	20	7.0	8	No visible change.
			16	" " "
			32	" " "
			64	" " "
	50	17.5	1	" " "
			2	" " "
			4	Discoloration begins.
			8	Discoloration gradually increases.
			16	" " "
			32	" " "
			64	" " "
	100	35	1	Discoloration begins.
			2	Discoloration increases and red glow begins.
			4	Same as 2 sec. but orange glow.
			8	" " " " "
			16	" " " " "
			32	" " " " "
			64	Glow remains after exposure.
	100	~1,000	< 1	Glow orange and damages surface.
			1	Glow orange and surface damage increases.
			2	" " " " and glows red on back.
			4	Same as 2 sec. and starts to burn through back.

Table III. Results of Exposure of Bright Finish Lightweight Materials to CO<sub>2</sub> Laser Radiation (cont'd)

SAMPLE #	BEAM POWER (Watts)	POWER IRRADIANCE (Watts/cm <sup>2</sup> )	TIME (sec)	REMARKS
430SS/ FM1311 (cont'd)	100	1,000	8	Same as 4 sec. and burns partially through back.
			16	Same as 8 sec. but burns completely through.
FM515	5	1.75	1	No visible change.
			2	" " "
			4	" " "
			8	" " "
			16	" " "
			32	" " "
			64	" " "
	10	3.5	1	" " "
			2	" " "
			4	" " "
			8	" " "
			16	" " "
			32	" " "
			64	" " "
	20	7.0	1	" " "
			2	" " "
			4	" " "
			8	" " "
			16	" " "
			32	" " "
			64	" " "

Table III. Results of Exposure of Bright Finish Lightweight Materials to CO<sub>2</sub> Laser Radiation (cont'd)

SAMPLE #	BEAM POWER (Watts)	POWER IRRADIANCE (Watts/cm <sup>2</sup> )	TIME (sec)	REMARKS
FM515	50	17.5	1	Discoloration begins.
			2	" " increases and orange-red glow.
			4	Same as 2 sec.
			8	" " " "
			16	" " " "
			32	" " " "
			64	" " " "
	100	35	1	Discoloring, red-orange
			2	Increasing discoloring and glow.
			4	" " "
			8	Same as 2 sec. and glow lingers after exposure.
			16	Same as 8 sec.
			32	" " " "
			64	" " " "
	100	1,000	1	Glow yellow to white, burns deep hole to backing.
			2	Brighter glow, hole larger.
			4	" " " "
			8	Glow lingers after beam and hole larger.

## RESULTS

The observed behavior of each sample under test is described in Tables II and III, and the damage sustained by each sample is shown in Figures 2 through 10.

The results for the darkly finished samples are presented in Table II. With increasing irradiance, all samples sustained surface discoloration before exhibiting further damage or penetration. The onset of surface burns and penetration damage was preceded by incandescence of the fibers which varied in intensity with the laser power output. The samples 430SS and FM515 showed appreciable resistance to the unfocused CO<sub>2</sub> laser for a time duration of a little over one minute. The irradiance thresholds of the materials for damage exceeding mere discoloration, an excerpt of Table II, are shown in Table IV. All of the samples were also subjected to 6.8 KW/cm<sup>2</sup>, whereupon most suffered complete penetration in less than one second. The exceptions are DH242 which took nearly two seconds to damage, and sample 430SS which underwent complete penetration damage in twenty-two seconds. Taking advantage of the spongy quality of DH242, it was soaked with water and then exposed to the 6.8 KW/cm<sup>2</sup> beam. After eighty seconds the wet DH242 sample had sustained only minimal surface damage.

The brightly finished samples show lower damage thresholds than the dark ones discussed above. These results are detailed in Table III, and damage thresholds are summarized in Table V. Again the samples 430SS and the FM515 have little damage at 35 W/cm<sup>2</sup>. At an irradiance of 1.0 KW/cm<sup>2</sup>, all samples were completely penetrated by the CO<sub>2</sub> laser beam within one second except the 430SS metal fiber board which was damaged within this period but not completely penetrated. Penetration of this sample occurred sixteen seconds later. The bright sample of DH242 is also spongy and was also soaked with water to determine its barrier properties at higher power irradiance. Using the laser beam at 1.0 KW/cm<sup>2</sup>, this sample was penetrated in eight seconds, therefore this material is not as good as its dark counterpart when treated similarly.

It must be pointed out that for both FM515 samples (dark and bright), which have an Inconel backing, complete penetration involves penetration of the fiber cover only. It could not be determined whether the Inconel backing was damaged, since the samples were not cut out to determine if any damage occurred there. However, at all the laser power ranges used, no complete penetration of the metal backing was observed.




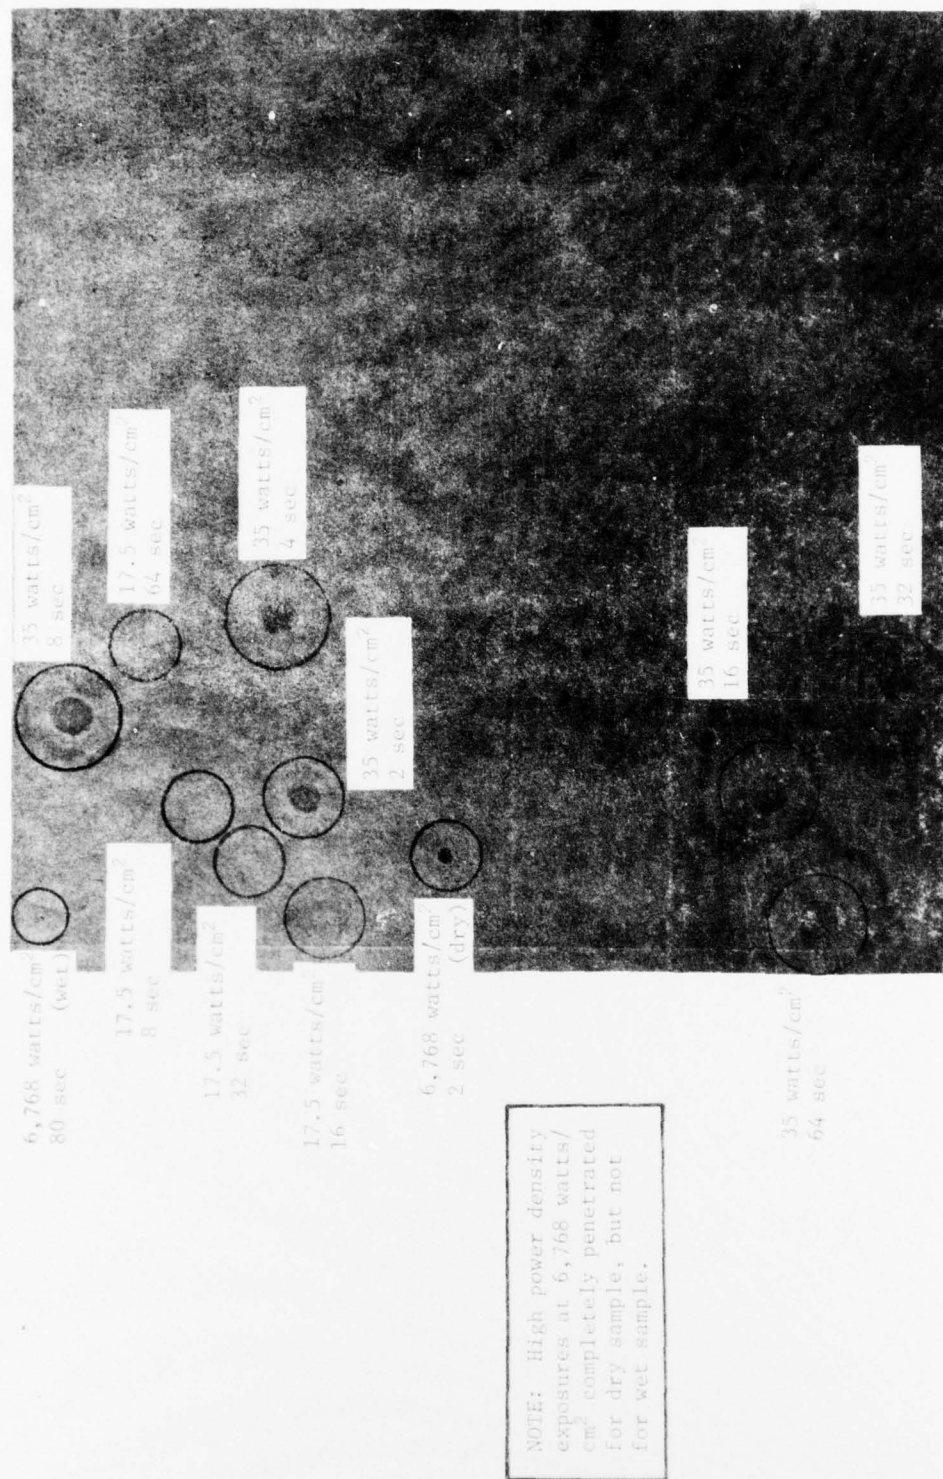



Figure 2. DH242 After Exposure to CO<sub>2</sub> Laser Radiation at Indicated Irradiances (watts/cm<sup>2</sup>, and times (sec)



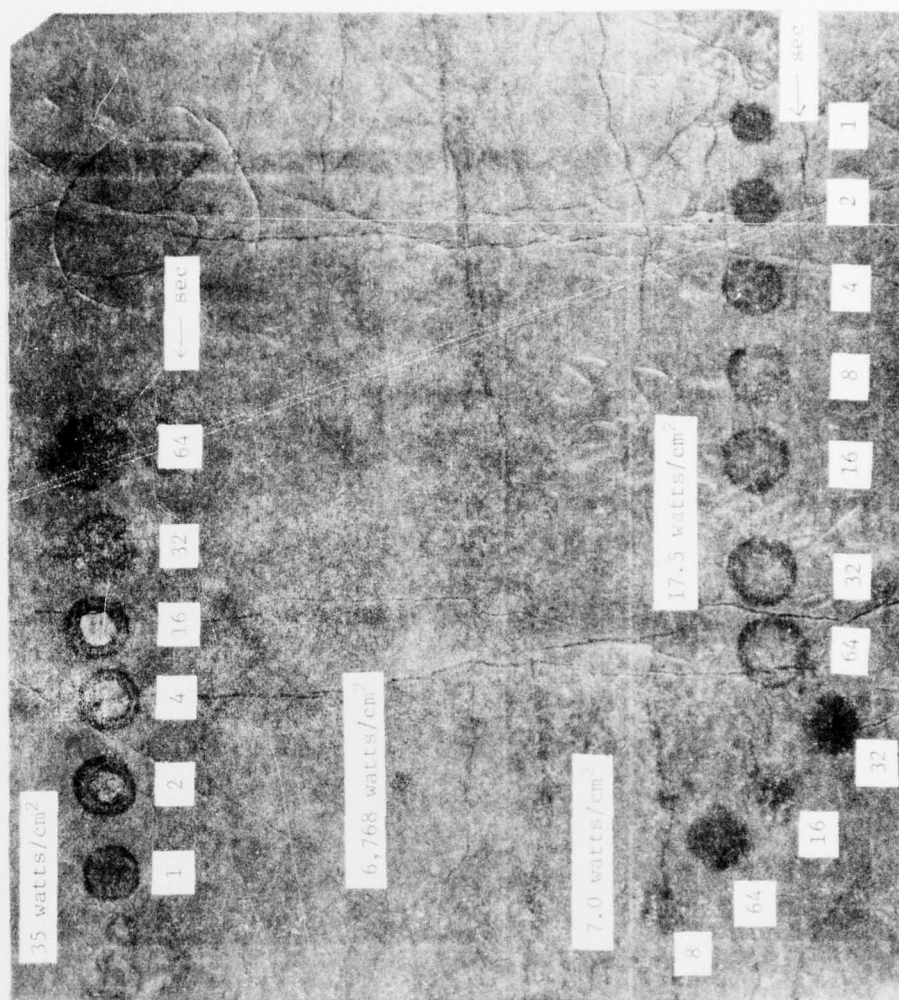

NOTE: High power density exposure at 6,768 watts/cm<sup>2</sup> resulted in complete penetration in < 1 sec.

Figure 3. 304 Stainless Steel After Exposure to CO<sub>2</sub> Laser Radiation at Indicated Irradiances (watts/cm<sup>2</sup>), and Times (sec)

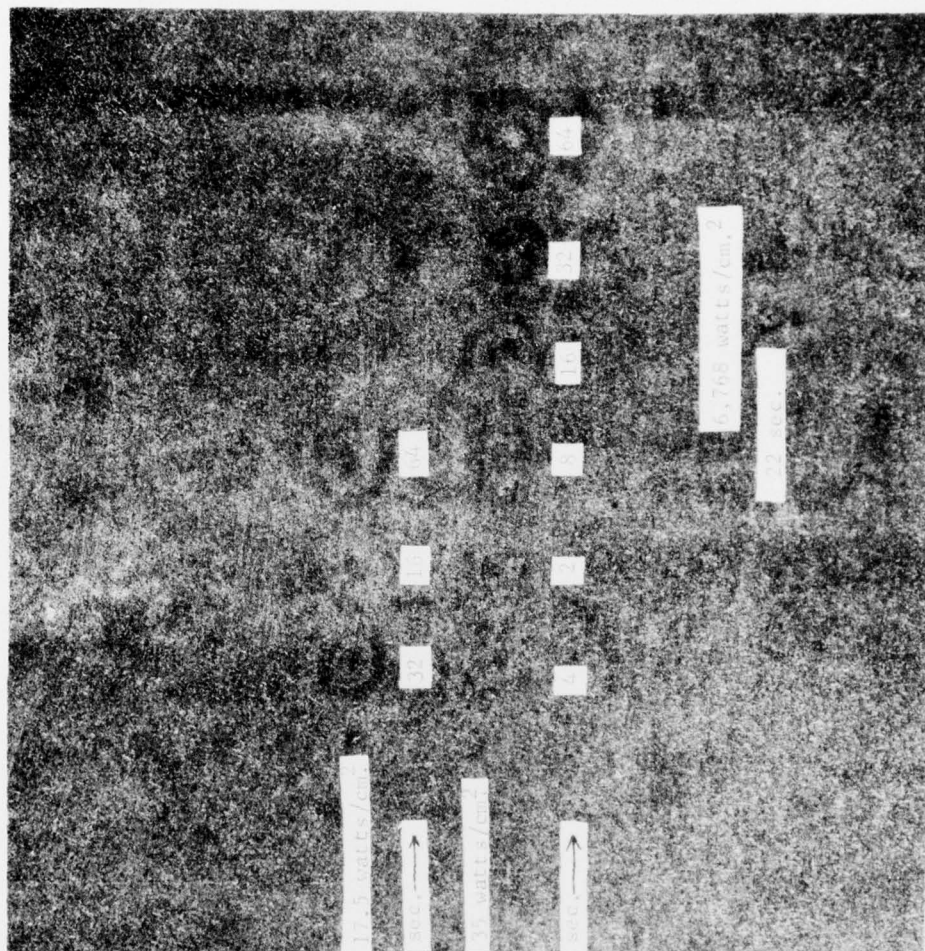


NOTE: High power density exposure at 6,768 watts/cm<sup>2</sup> resulted in 90% penetration.

Figure 4. 430 Stainless Steel After Exposure to CO<sub>2</sub> Laser Radiation at Indicated Irradiances (watts/cm<sup>2</sup>), and Times (sec)





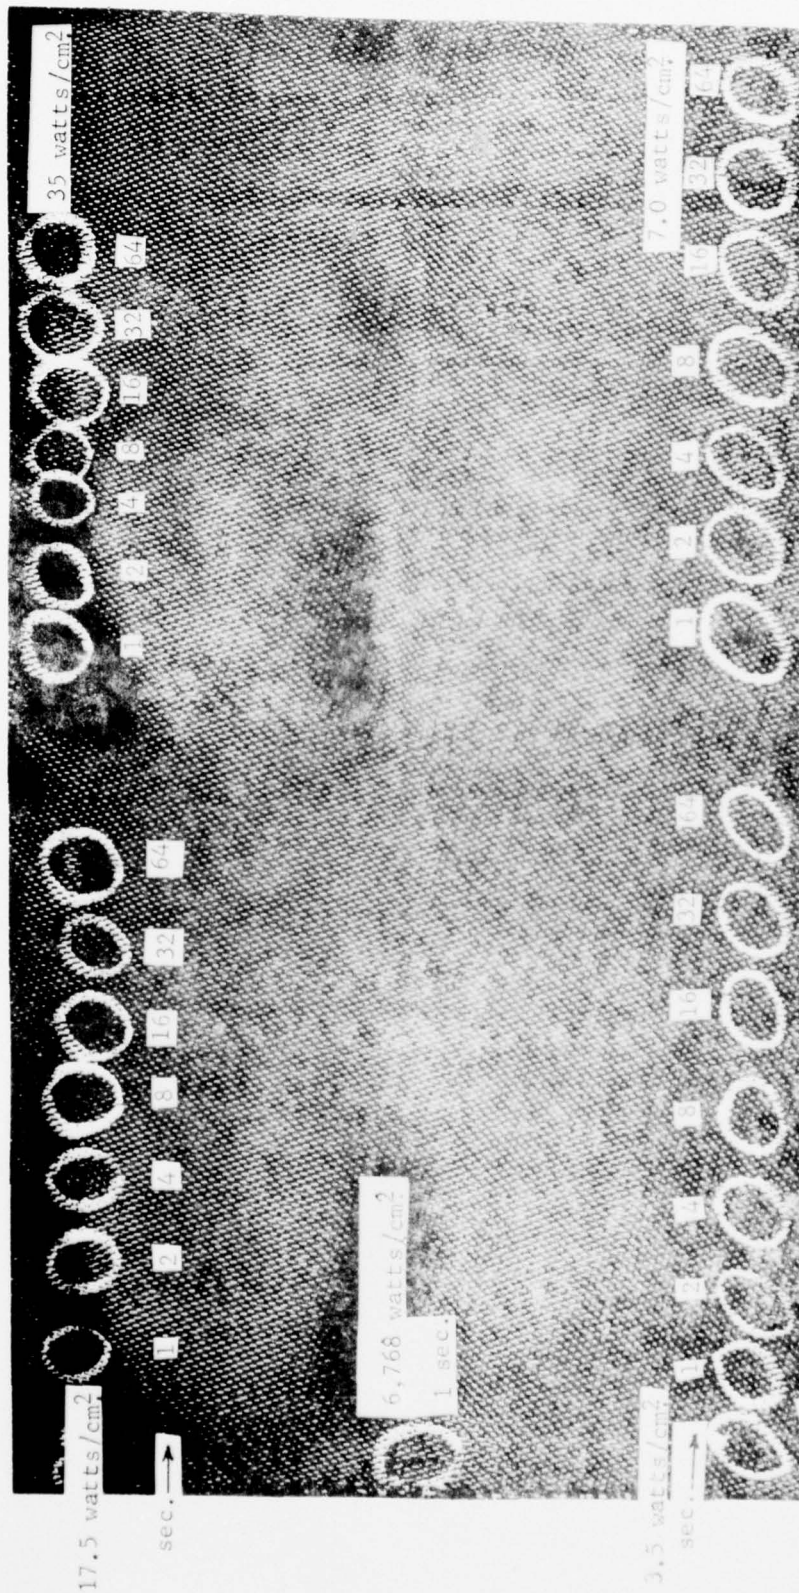

NOTE: High power density exposure at 6,768 watts/cm<sup>2</sup> resulted in complete penetration.

Figure 6. Graphite Cloth After Exposure to CO<sub>2</sub> Laser Radiation at Indicated Power Densities (watts/cm<sup>2</sup>) and Times (sec)

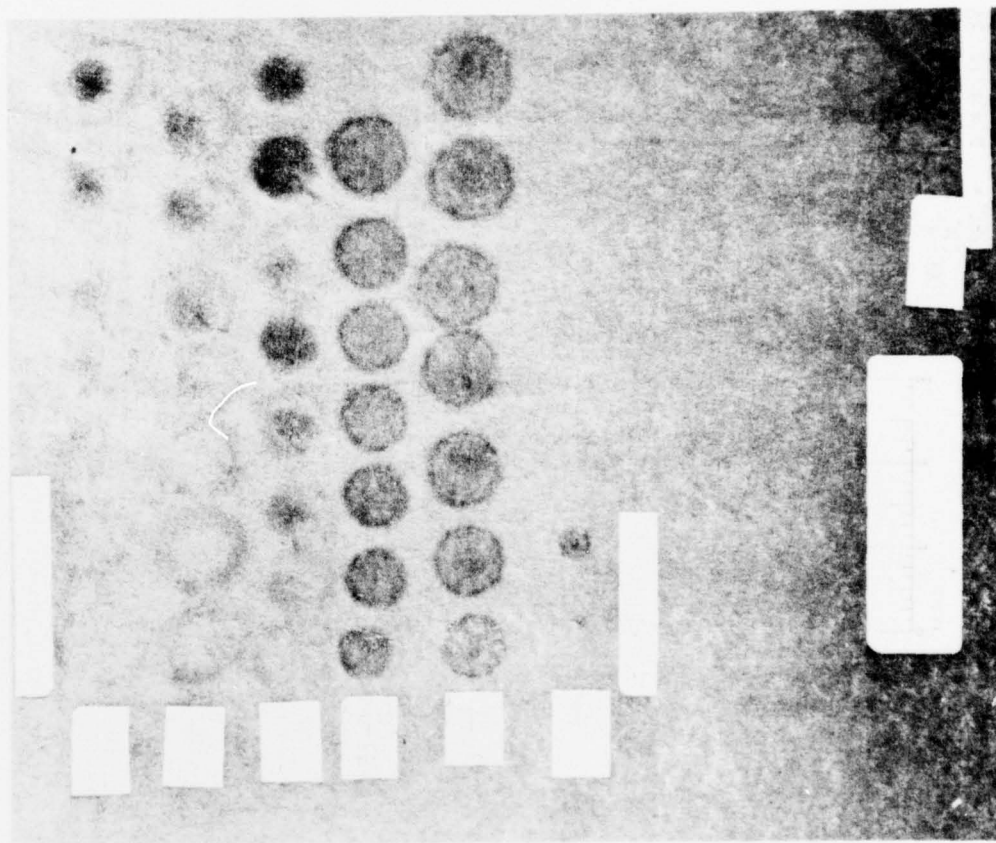


Figure 7. DH242 After Exposures to CO<sub>2</sub> Laser Radiation at Indicated Irradiances (watts/cm<sup>2</sup>) and Times (sec)



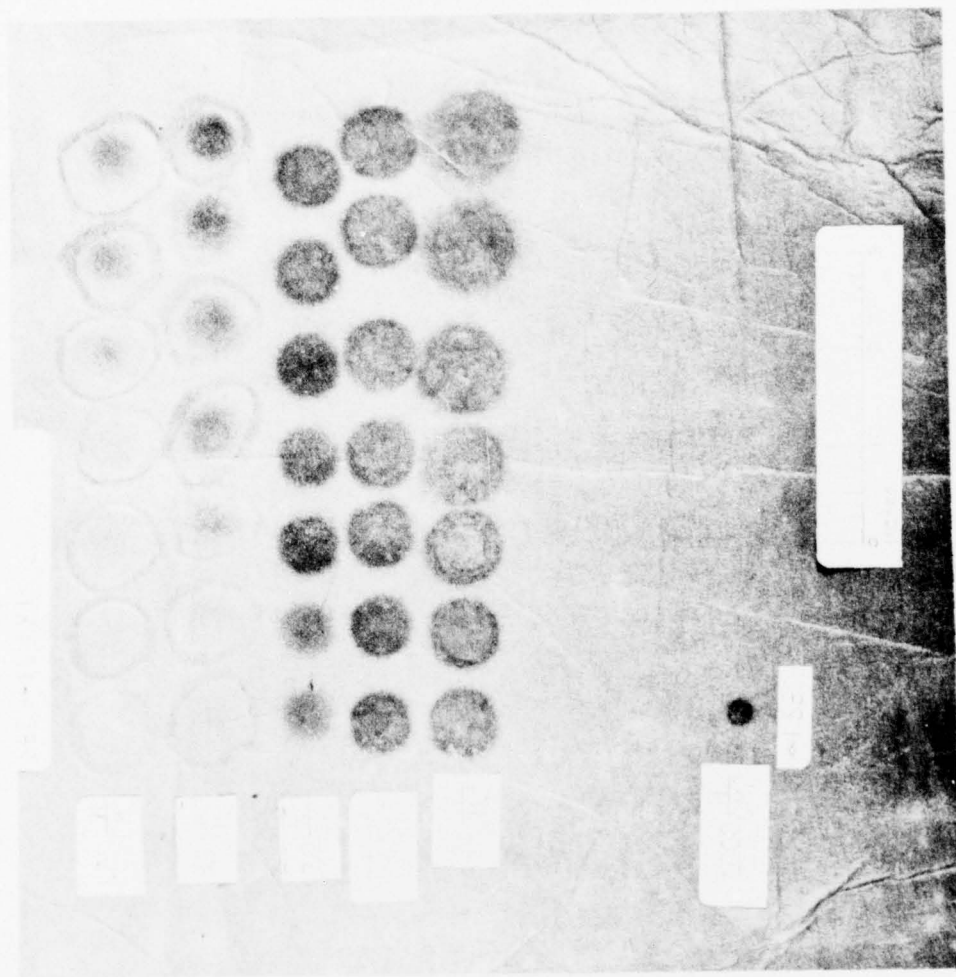


Figure 8. 304 Stainless Steel After Exposures to CO<sub>2</sub> Laser Radiation at Indicated Irradiances (watts/cm<sup>2</sup>) and Times (sec)

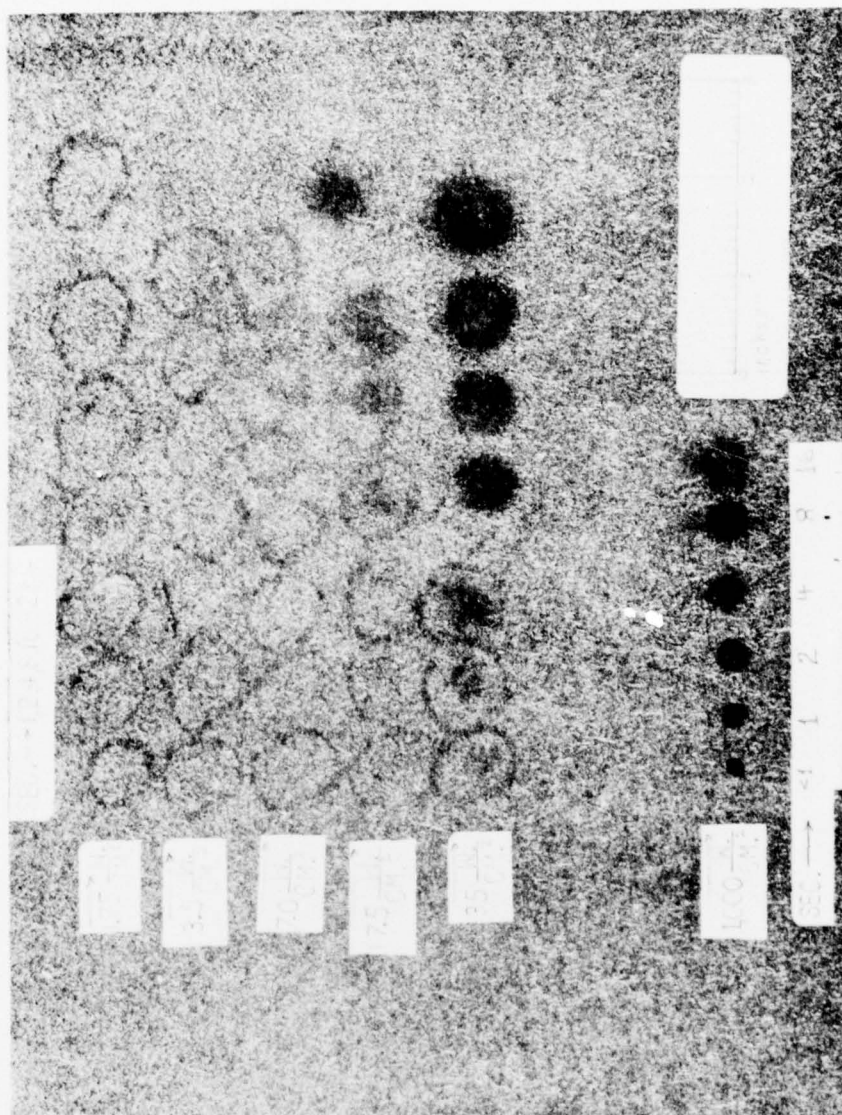


Figure 9. 430 Stainless Steel After Exposures to CO<sub>2</sub> Laser Radiation at Indicated Irradiances (watts/cm<sup>2</sup>) and Times (sec)

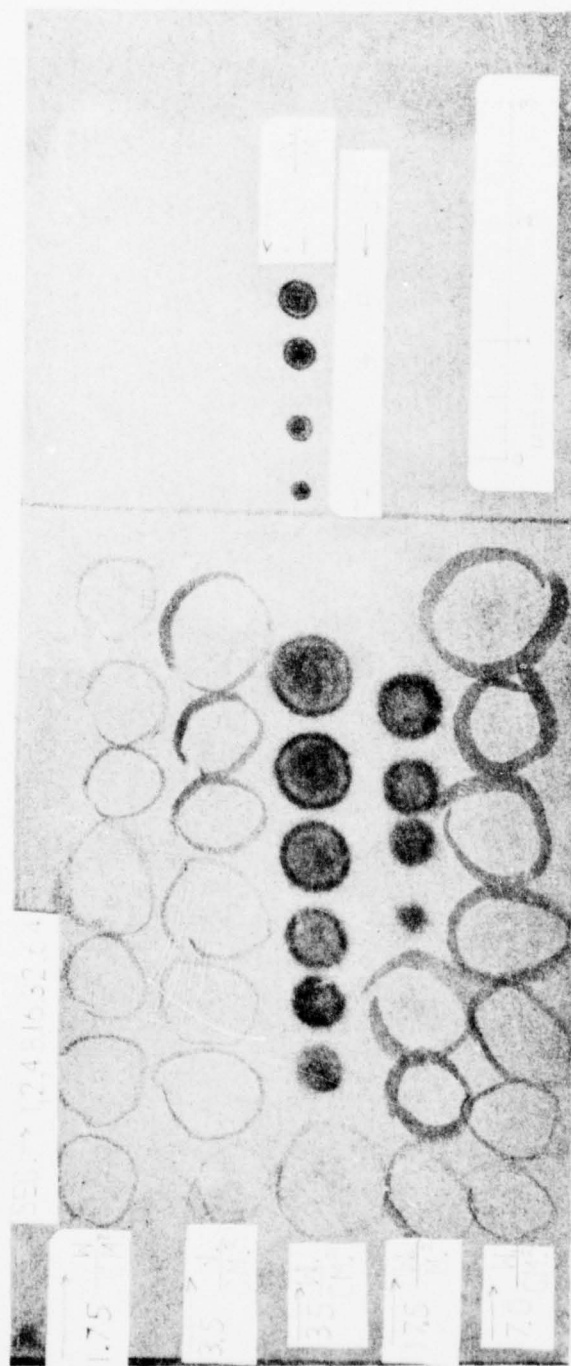


Figure 10. FM515 After Exposures to CO<sub>2</sub> Laser Radiation at Indicated Irradiances (watts/cm<sup>2</sup>) and Times (sec)

Table IV. CO<sub>2</sub> Laser Irradiance Damage Threshold of  
Dark Finished Lightweight Materials

SAMPLE #	TIME (sec)	POWER IRRADIANCE (Watts/cm <sup>2</sup> )	DESCRIPTION OF DAMAGE
DH242 (dry)	2	35	Surface
304 S <sub>λ</sub> S <sub>λ</sub>	1	35	Penetration begins
430SS/ FM1311	64	35	Superficial
FM515	64	35	Discoloration and surface cracks
Graphite Cloth	16	17.5	Surface
DH242 (wet)	80	6,768.00	Superficial

Table V. CO<sub>2</sub> Laser Irradiance Damage Threshold of  
Bright Finished Lightweight Materials

SAMPLE #	TIME (sec)	POWER IRRADIANCE (Watts/cm <sup>2</sup> )	DESCRIPTION OF DAMAGE
DH242 (dry)	8	7.0	Surface
304 S <sub>A</sub> S <sub>A</sub>	2	35.0	Surface
430SS/ FM131	4	17.5	Surface
FM515	4	17.5	Surface
DH242 (wet)	2	1,000.00	Penetration



#### CONCLUSIONS AND RECOMMENDATIONS

The above results illustrate that these metal-fiber materials offer very little protection against CO<sub>2</sub> laser damage. The only exception is the water impregnated dark DH242 which sustained minimal surface damage at power densities of 6.8 KW/cm<sup>2</sup>. This capability renders this sample useful as a probable barrier material to CO<sub>2</sub> laser radiation.

Further investigations of the DH242 (dark, water impregnated) sample are recommended to determine the extent of its usefulness as a CO<sub>2</sub> laser barrier. Studies should be conducted to find out the temperature gradients through and across the sample when the material is irradiated by the laser. Laser damage threshold should be determined. Since the metal fiber of this sample is steel, environmental studies should be conducted to assess corrosion and its effects on the CO<sub>2</sub> laser barrier properties of the material. For this reason, water impregnation may be impractical. A search of other impregnating materials should also be conducted.

DISTRIBUTION

Commander  
US Army Materiel Development and  
Readiness Command  
5001 Eisenhower Avenue  
Alexandria, VA 22333

1 Attn: DRXRD-MT  
Mr. E. Sedlak

1 Attn: DRXRD-T  
Mr. R. Zentner

Commander  
US Army Missile Command  
ATTN: AMSMI-RX  
LT J. Hammond  
Redstone Arsenal, AL 35809

Commander  
US Army Armament Command  
Rock Island, IL 61201

1 Attn: AMSAR-RDT  
Mr. J. Turkeltaub

1 Attn: AMSAR-RD  
Mr. J. Brinkman

1 Attn: AMSAR-RDE  
Mr. E. Vaughan

1 Attn: AMSAR-RDT  
Dr. R. L. Moore

Commander  
US Army Materials & Mechanics  
Research Center  
ATTN: AMXMR-D  
Mr. R. Fitzpatrick  
Watertown, MA 02172

Commander  
US Army Natick Laboratories  
ATTN: Dr. E. Healy  
Natick, MA 07162

US Army Foreign Science & Tech-  
nology Center  
ATTN: AMXST-BS (Stop 196)  
Munitions Bldg.  
Washington, DC 20315

Commander  
Naval Research Laboratory  
Washington, DC 20390

1 Attn: Dr. J. Anderson  
CODE 6550

1 Attn: Dr. A. Schlinder  
CODE 6330

Department of the Air Force  
Air Force Avionics Laboratory (AFSC)  
ATTN: Mr. R. Firsdon, ASD/RWT  
Wright Patterson AFB, OH 45433

Air Force Weapons Laboratory  
Kirtland Air Force Base  
ATTN: CPT M. Kemp, Bldg. 497  
Albuquerque, NM 87116

Commander  
Kelly Air Force Base  
ATTN: AFSPCOMMCEN/TDT  
San Antonio, TX 78243

Director  
Eustis Directorate  
US Army Air Mobility R&D Laboratory  
ATTN: SAVDL-EU-SS  
Mr. J. Ladd  
Ft. Eustis, VA 23604

Commander  
US Army Electronics Command  
ATTN: AMSEL-CT-L  
Dr. R. Buser  
Ft. Monmouth, NJ 07703

# DISTRIBUTION

ARPA  
Architect Building  
1400 Wilson Blvd.  
Arlington, VA 22209

1 Attn: Dr. E. Gerry

1 Attn: Dr. P. Clark

US Army Research Office  
Room 1A881, Pentagon  
Washington, DC 20310

1 Attn: DARD-ARS-PP  
MAJ A. Mullin

1 Attn: DARD-ARS-PP  
Dr. J. I. Bryant

1 Attn: DARD-ARS-PP  
Dr. R. Watson

Commander  
U.S. Army Research Office  
ATTN: Mr. J. J. Lontz  
P.O. Box 12211  
Research Triangle Park, NC 27709

Commander  
Naval Ordnance Laboratory  
ATTN: Code 413-4153  
Mr. E. Eagleson  
White Oak, MD 20910

Commander  
Wright Patterson Air Force Base  
ATTN: AFML/LTL  
MAJ P. Elder  
Dayton, OH 45433

Defense Documentation Center  
Camerson Station  
Alexandria, VA 22314

Commander  
Frankford Arsenal  
Philadelphia, PA 19137

1 Attn: SARFA-CO/107-1

1 Attn: SARFA-CE/107-1

1 Attn: SARFA-TD/107-1

1 Attn: SARFA-PD/64-4

1 Attn: SARFA-PDR/64-4

4 Attn: SARFA-PDS/65

1 Attn: SARFA-PDS-C/65

1 Attn: SARFA-PDS-P/65

1 Attn: SARFA-PDC/64-3

1 Attn: SARFA-FC/201

1 Attn: SARFA-FI/107-B

1 Attn: SARFA-PA/107-2

3 Attn: SARFA-TSP-L/51-2  
1 - Circulation copy  
1 - Reference copy  
1 - Record copy

Printing & Reproduction Division  
FRANKFORD ARSENAL  
Date Printed: 18 Feb 77